



CrossGrip Roof Walkway Matting



Industrial Flooring

 Light Duty

Description

Slip-resistant matting for underfoot safety and comfort whilst essential works on flat roofs, gantries and high-level walkways are carried out.

CrossGrip Roof Walkway Matting is manufactured from a durable two-layer construction that contours to the roof structure and protects the existing roof membrane. The diamond-cut pattern and cross-directional top ribs ensure a firm underfoot grip for extra traction in high winds.

Guide price

£650.00 (excl. VAT)

*We advise checking any agreed or pre-authorised disclaimers on our website before installing or using any of our products, along with live updated and discounted prices available.

- ✓ High slip-resistance for pedestrian access, certified to (DIN51130:R10;ASTM1677:1.0/0.9)
- ✓ Excellent drainage, certified to (DIN 51130:V10)
- ✓ Fantastic sound absorption
- ✓ UV resistant with anti-bacterial properties

LOWEST PRICES We won't be beaten on price - find it cheaper and we'll beat it!


Specifications

 Size	10m [L] x 1220mm / 910mm / 600mm [W] x 14mm [D]
 Weight	6.6Kg per m²
 Load	Foot traffic only
 Surface	Diamond-cut, non-slip pattern surface and cross-directional ribs
 Material	Polyvinyl Chloride (PVC)
 Colour	Light grey or black as standard

In fact, the matting is stable in winds of up 60mph but tested by MIRA to withstand winds of up to a maximum of 94mph!

CrossGrip Roof Walkway matting has also been formulated with anti-bacterial additives to prevent build up and keep the product clean, requiring minimal periodic maintenance.

It is fast and easy to install, with no specialist equipment required.

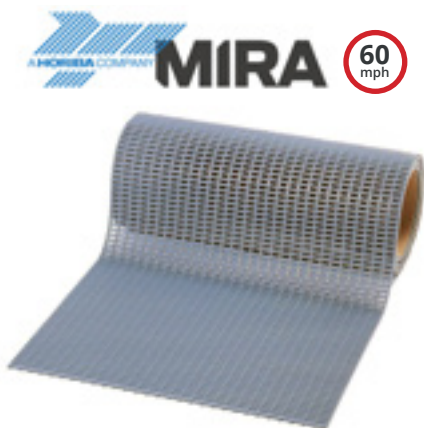

Contact us to find out about products available for hire and finance.

Step 1



Step 2



Step 3



Step 4



Download MultiMatts Brochure

How to install the CrossGrip Roof Walkway Matting



Preparation

Ensure that there is a smooth surface with no obstructions to prevent ridges under the matting when installed.



Installation

Simply roll out the CrossGrip Roof Walkway Matting over the area to be covered. It can be laid loose with no fixing pins required. Add more rolls until your desired area is covered and for instant use.



Connection

If you're looking to connect multiple rolls of matting together, cable ties can be used to increase the connection strength.