

Lightweight, modular event flooring system designed to provide safe, non-slip pedestrian access across grass or soft ground. It is widely used in events, festivals, stadiums, marquees, exhibitions, and temporary walkways, offering a cost-effective and eco-friendly alternative to traditional flooring.

 Light Duty


Specifications

Size:	Tile: 31.11cm [L] x 8.51cm [W] x 1.59cm [D] Supplied in 1m ² sections
Weight:	3.7Kg per m ²
Load:	Weight tested to 2 tonnes (depending on ground conditions)
Material:	High impact UV protected polypropylene, 100% Recycled plastic
Features:	<ul style="list-style-type: none"> ○ Lightweight and anti-slip ○ Can be laid in any format ○ High heel friendly, wheelchair access ○ Can be laid onto grass or solid surfaces ○ Easy clean/wipe
Preventative:	Decreases soil compaction and avoids damage to existing ground
Preparation:	A geotextile material is recommended as underlay if usage is for longer than a week or in cases where weather is likely to be wet
Storage:	Can be palletised

Delivery

We hold most stock, so whether you require same/next day or standard delivery, here are the options to receive products.



Same day*



Next day*



Standard 3 days

Typical enquiries handled within 1 hour from receiving your call.

* Depending on stock availability when placing order

Sports Grounds

Pedestrian Walkways

Marquee/Garden

Outdoor Events



2 tonnes


 3.7Kg/m²


Purpose

- Turf and surface protection system
- Prevents soil compaction
- Provides safe and effective access for pedestrians and wheelchair users

Additional Products

As an alternative option, please take a look at our [Safe Site Matting](#) or [Safe Walk](#).

Contact Us

 Multimatts.co.uk
 sales@multimatts.co.uk

Installation Guide


Step 1 – Preparation

Ensure that you know exactly the area you are covering and that you have the following tools to hand before going ahead with the installation.

Where PortaPath is going to be laid for longer than a week and if the weather is likely to be wet, it's recommended that a geotextile material is used as an underlay.



*Hand Tools required such as flat head screwdrivers for separating, rubber mallet for edging strip, tent pegs for security and a string line to ensure the matting is straight.

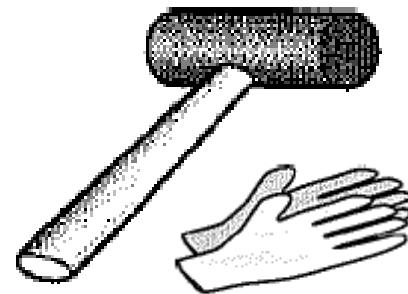

Step 2- Assembly

Peg out a string along the longest right-hand-side of the site area. Starting from the bottom of the string, lay each PortaPath roll in front each time.



Step 3 - Installation

When laying each PortaPath roll in front make sure that the clip connectors are on the short end of the adjacent tile.

Connect the adjacent lines to the left of the first, so that the clip connectors overlap on the short side.

Then apply light foot pressure to connect and lock the connectors

*Do not try to join up to large separately laid sections of PortaPath Flooring, as the two matting faces may not match.

Need to Natter?

 0800 292 2474

 Multimatts.co.uk

 News, insights and events

 Shared business and industry information

 'How to' use our products, installations and vlogs

Installation timings

 1 person required

 Single line connection in 1 mins

 Grid connection in less than 2 mins

 200m² area in approx. 2 hours (depending on ground conditions and site layout)



Eco-friendly and long lasting

Made from High impact UV protected polypropylene and 100% Recycled Plastics, which is also 100% Recyclable

PortaPath

Perfect for any event, whatever the size, PortaPath prevents soil compaction, with its unique non-slip surface this product is ideal for pedestrians and wheelchair users for any event.,



Additional Information

PortaPath is a durable, lightweight, attractive and affordable solution with a unique and integral 'living hinge' design which gives the system strength when locked together.

The ventilation slots within the PortaPath allow light and air through the grass beneath to help reduce grass discolouration and damage.

*Marker tiles are a useful component to indicate where to separate the floor to simply disassemble large areas of flooring.



[CLICK HERE TO PLAY VIDEO](#)

This system is easy to clean, maintain and fast to install and dismantle.

Handling and Storage

PortaPath is delivered to site in pre-wrapped packs and banded with polyester strips. Pallets are incorporated into the packaging to aid the use of mechanical handling with apparatus such as fork-lifts and lifting booms with slings.

The PortaPath should be stored in original packaging on a flat, solid and free draining storage area and we recommend the banding should not be removed when storing them, unless when safely positioned at ground level or until ready for use.

Gloves should be worn when handling PortaPath.

Need to Natter?

0800 292 2474

Multimatts.co.uk

News, insights and events

Shared business and industry information

'How to' use our products, installations and vlogs

Please note, in situations where it is expected that PortaPath is going to be laid longer than a week and the weather is likely to be wet, it is recommended that a geotextile material is used as an underlay. This will prevent the possibility of the tiles sinking into the mud, which can then find its way to the top surface of the PortaPath Flooring.

PortaPath can be swept, mopped, or cold pressure washed with standard cleaning solutions. The removal of chewing gum and sticky substances can be helped with lubricating spray such as WD40. Badly stained and/or damaged tiles should be removed or replaced.

MultiMatts Ltd accepts no liability whatsoever from any damage, loss or injury arising from the installation and ground conditions on which these products are used.

We advise not to use vehicles with any PortaPath unless pre-authorised and agreed beforehand. Traversing and aggressive movement on the mats may cause damage to them and the connectors, and this will be the sole responsibility of the customer and user of the mats.